


FGY-Z 系列支架荧光灯(T8/T5/LED)

Series Bracket Type Fluorescent Lamps (T8/T5/LED)




Office Light Fittings
办公照明灯具系列

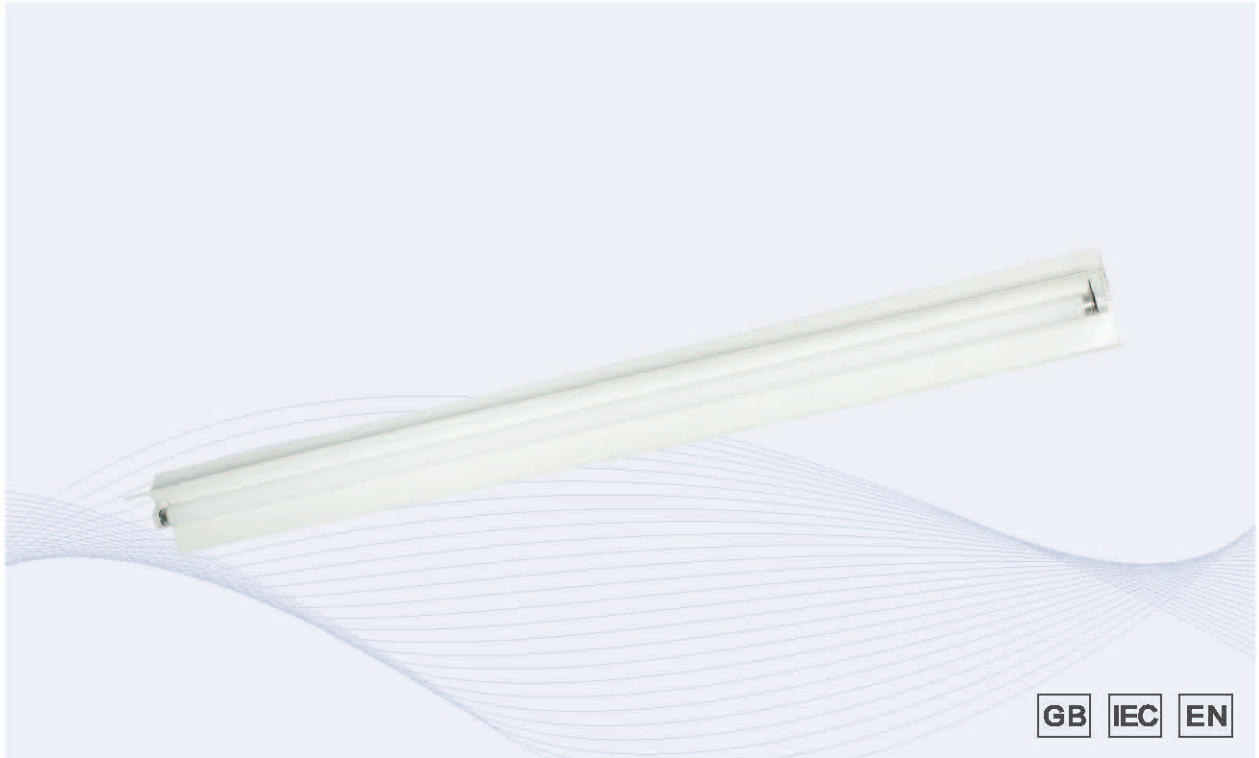

GB IEC EN

◆ 型号规格含义/Catalogue number logic

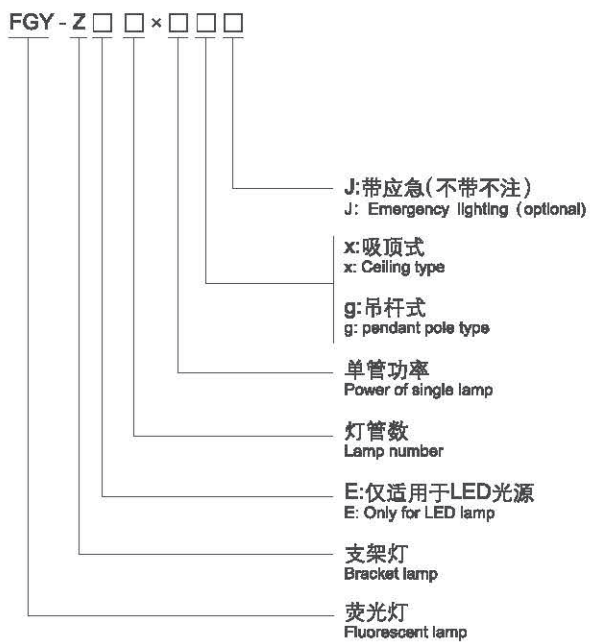


◆ 产品特点/Product features

- ◆ 优质钢板成型壳体, 表面喷塑;
- ◆ 配置T5/T8荧光灯管或LED灯管;
- ◆ 可外置应急装置, 应急时间 > 90min.
- ◆ High quality steel plate molding enclosure, powder coated surface.
- ◆ Equipped with T5/T8 fluorescent tube or LED tube.
- ◆ Can equip external emergency device, emergency time > 90min.

◆ 配光曲线/Luminous intensity distribution

cd/1000lm




◆ 技术参数/Technical parameters

执行标准 Executive standards	中国GB标准 Chinese GB standards	国际IEC标准 / International IEC standards 欧盟EN标准 / European EN standards	北美标准 American standards
额定电压 Rated voltage	220V AC 50Hz/60Hz	220V~240V AC 50Hz/60Hz	100V~277V AC 50/60Hz
环境温度 Ambient temperature	-25℃~+45℃	-25℃~+55℃	-25℃~+55℃
光源功率 Lamp power	LED荧光灯管/LED fluorescent tube: 1 x 10W 2 x 10W 1 x 20W 2 x 20W T8荧光灯管/T8 fluorescent tube: 1 x 18W 2 x 18W 1 x 36W 2 x 36W T5荧光灯管/T5 fluorescent tube: 1 x 28W 2 x 28W		



◆ 外形尺寸/Outline dimension (mm)

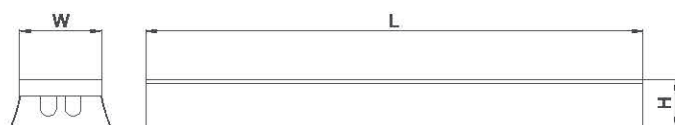

壳体 Enclosure	尺寸 Size	L	W	H	功率 Power	重量 Weight
I型/Type I		625	50	75	1 x 18W(10W)	0.55kg
II型/Type II		625	80	65	2 x 18W(10W)	1.0kg
III型/Type III		1235	50	75	1 x 36W(20W)	1.0kg
IV型/Type IV		1235	80	65	2 x 36W(20W)	1.3kg
V型/Type V		1180	90	58	1 x 28W	0.9kg
VI型/Type VI		1180	123	58	2 x 28W	1.2kg

◆ 订货须知/Ordering Information

- ◇ 注明执行标准、工作电压、环境温度;
- ◇ 按照产品型号规格说明逐条选择, 例如: 需36W双管支架荧光灯, 带反射罩, 吸顶式安装, 则产品选型为FGY-Z2x36x;
- ◇ 供货LED灯具时, 出厂配置LED光源; 其他灯具出厂时不配光源;
- ◇ 可配装应急装置, 应急时只有一根灯管工作。
- ◇ Specify the executive standard, working voltage, environment temperature.
- ◇ Follow the product catalogue number logic for selection. For example:
36W bracket type fluorescent lamp with two tubes, equipped with reflector and electronic ballast, ceiling type, the product type shall be FGY-Z2x36x.
- ◇ LED light fittings are supplied with LED lamp. Other light fittings are supplied without light source.
- ◇ Can equip external emergency device, only one lamp tube works for emergency.