

# HR-ZFZD-E3W-FAJ 系列消防应急照明灯具

## Series Fire Emergency Light Fittings



Waterproof



Dustproof




Corrosionproof

Weatherproof Light Fittings  
防水 防尘 防腐 灯具 系列



### ◆ 型号规格含义/Catalogue number logic

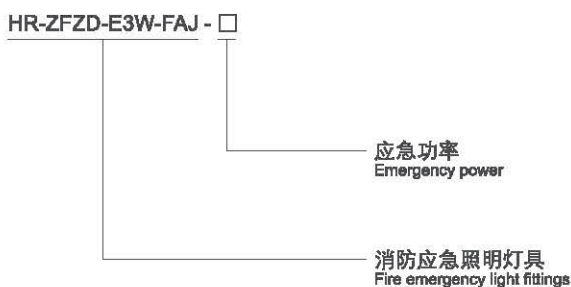

### ◆ 产品特点/Product features

- ◆ 本产品执行GB17945《消防应急照明和疏散指示系统》标准;
  - ◆ 碳钢外壳, 表面高压静电喷塑;
  - ◆ 玻璃透明罩, 不锈钢外露紧固件;
  - ◆ 内置免维护电池组, 在正常供电下自动充电, 事故断电或停电时应急灯自动点亮;
  - ◆ 应急灯自动切换应急, 并具有过放电和过充电保护等功能;
  - ◆ 应急专用式, LED光源, 仅在应急时工作;
  - ◆ 设有月检功能, 每月自动放电一次, 应急工作状态维持120s, 自动恢复主电状态;
  - ◆ 设有年检功能, 每隔一年自动由主电转入应急工作状态并持续至放电终止, 然后自动恢复主电状态;
  - ◆ 钢管或电缆布线均可;
  - ◆ 防腐等级: WF2。
- ◆ This product executes GB17945 fire emergency lighting system standard.
  - ◆ Carbon steel enclosure, with high-voltage electrostatic powder coated surface.
  - ◆ Glass transparent cover, stainless steel exposed fasteners.
  - ◆ Built-in maintenance free battery pack, charging automatically under normal powersupply, when the power source is cut off, it will be switched to emergency state.
  - ◆ With overcharging and over discharging protection, emergency lights switch to emergency status automatically.
  - ◆ Emergency special type, LED light source, only works under emergency state.
  - ◆ With monthly inspection function, automatic charging once a month, emergency working state maintains 120s and then recover to main supply state automatically.
  - ◆ With yearly inspection function, switch from main supply status to emergency working conditions every other year and continue to the end of over charging, and then back to main supply status.
  - ◆ Steel pipe or cable wiring is optional.
  - ◆ Corrosion-proof: WF2.


### ◆ 技术参数/Technical parameters

执行标准 Executive standards	中国GB标准 Chinese GB standards	国际IEC标准 / International IEC standards 欧盟EN标准 / European EN standards
额定电压 Rated voltage	220V~240V AC 50/60Hz (可选/Optional)	
环境温度 Ambient temperature	-25℃~+45℃	-40℃~+55℃
应急时间 Emergency time	> 90min	
防护等级 Degree of protection	IP65	
光源功率 Lamp power	3W	
灯具重量 Weight of Light fitting	0.7kg	



Weatherproof Light Fittings  
防水防尘防腐灯具系列

### ◆ 外形及安装举例/Outline and mounting type (mm)

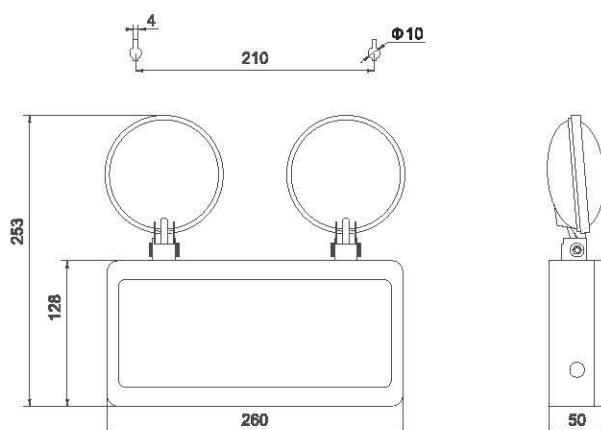

### ◆ 订货须知/Ordering Information

- ◇ 注明执行标准、工作电压、环境温度；
- ◇ 按照产品型号规格说明逐条选择，例如：需要消防应急照明灯具，则产品选型为HR-ZLZD-E3W-FAJ-3。
- ◇ Specify the executive standard, working voltage, environment temperature.
- ◇ Follow the product catalogue number logic for selection. For example:  
Fire protection emergency light fitting, the product type shall be HR-ZLZD-E3W-FAJ-3.